

Cadillac CTS Coupe LED Reflectors

Tools Needed

- Jack or Ramps
- Electrical Tape
- Zip Ties
- Panel Pullers or Flat Head
- Needle Nose Pillars
- 5/16 Drill Bit
- Test Light



CUSTOMER RIDE: IG @STATILAC

Installation Quick Tips

You will need to jack the car up a bit from the rear. Or if you have ramps to access the rear reflectors have a place clip that holds them in place. Once you take the plastic washers off the valance you can bend it enough to get pillars behind to pinch the clips together to get them off just use a small tip flat head to move them out. Put them to the side.

Section of the reflector that has the wires coming thru you will need to drill a hole to fit the wires with no problem. Use the 5/16 drill bit to drill a hole run your wires. Once wires are ran, and reflector is back in place. Please note, they will fit snug and that's totally fine!


Run the wires up to your tail light harness. Take off your tail light to make the job easier to run the light up and tap into the harness. Find your running light wire or parking light. And than ground.

Reflector Install Note: Red - Parking / Black - Ground
Brown/White wire is Running lights - Black wire Ground

Pigtail pictured is CTS Sedan (Coupe should** have the same wires & plug)

You are now ready to enjoy your lights. Any questions feel free to contact me. And don't forget to



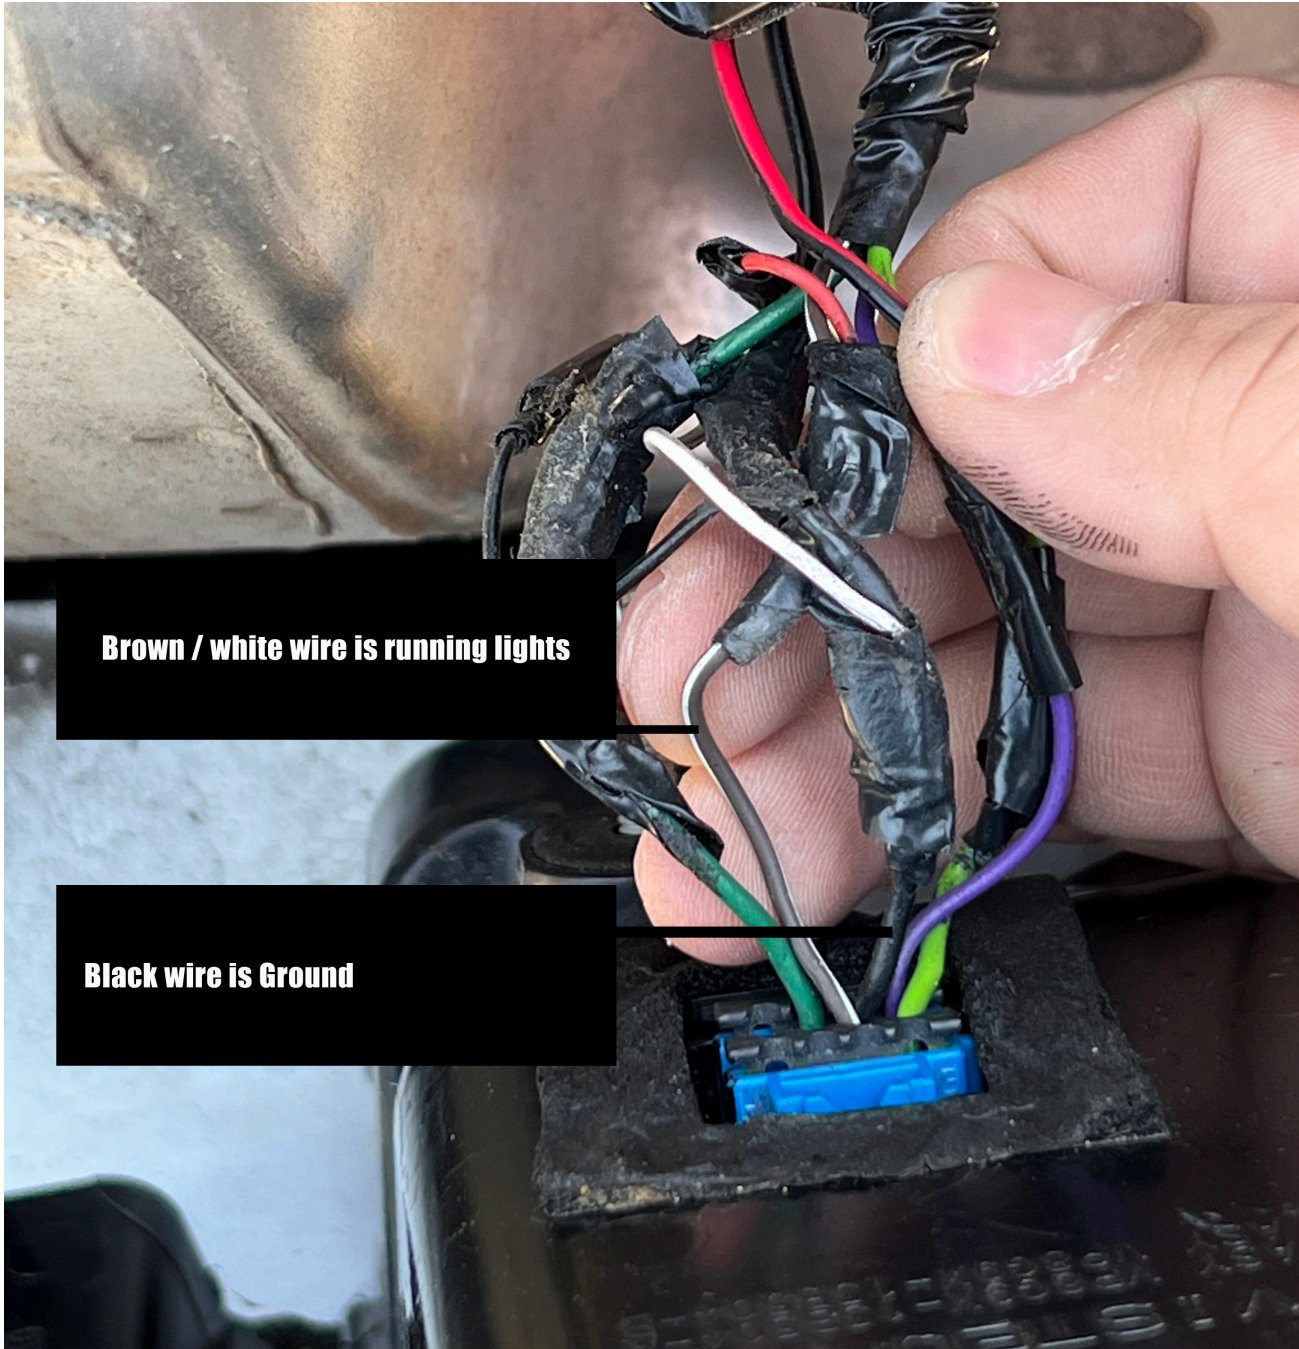

Brown / white wire is running lights

Black wire is Ground

